



IMAGINATION

WITHOUT  
LIMITS

TEN  
FEET  
LAMINATE  
COLLECTION



Greenlam is among the world's top 3, Asia's largest, and India's No. 1 surfacing solutions brand. With its presence in over 100 countries, Greenlam has focused on developing quality products with a great passion for innovation. It offers end to end surfacing solutions spread across decorative laminates, compact laminates, interior and exterior grade compact laminates, restroom cubicles & locker solutions, decorative veneers, engineered wooden floors and doors.

With three state-of-the-art manufacturing facilities in the country located at Behror (Rajasthan), Nalagarh (Himachal Pradesh) and Prantij (Gujarat), it is the first choice of architects, interior designers, and homeowners when it comes to transforming living spaces.

Greenlam aims and acts to save and preserve nature in its pristine form by ethical sourcing of its raw materials from the world over, thereby ensuring they are environment friendly and safe to use. With its extensive presence of sales team and channel partners globally, Greenlam is poised to meet all your surfacing needs.

# TEN FEET LAMINATES

Presenting, exclusive 4'x10' size of laminate collection.

With its long height and perfect finishing, the 4'x10' laminate is apt for paneling in spaces with a high ceiling height.

It also is a good choice to cover long surfaces in furniture design. The 4'x10' offers the ultimate in seamless finishing to your spaces by reducing the joining process.

Now, save time, money and reduce wastage!

- Panelling in Common space
- Office furniture
- Large Conference Table
- Doors Applications
- Kitchens & Wardrobes

#### Segment

- Commercial and Residences


#### APPLICATION AREAS



Health Care  
Education



Hospitality



Workspaces



Retail



Airports



Residential  
Schools  
Kitchens  
Wardrobes



PERFECT

TALL







CLEAR MESH

Design#: 5566 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



EARTHEN MESH

Design#: 5569 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



CREME MARQUINA

Design#: 5571 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



GREY MARQUINA

Design#: 5572 SUD

Thickness: 1 mm

Available Texture: SUD/MAT





**META SILVER**

Design#: 923 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**AMERICAN WALNUT**

Design#: 608 SUD

Thickness: 1 mm

Available Texture: SUD/MAT




**HILAND PINE**

Design#: 682 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



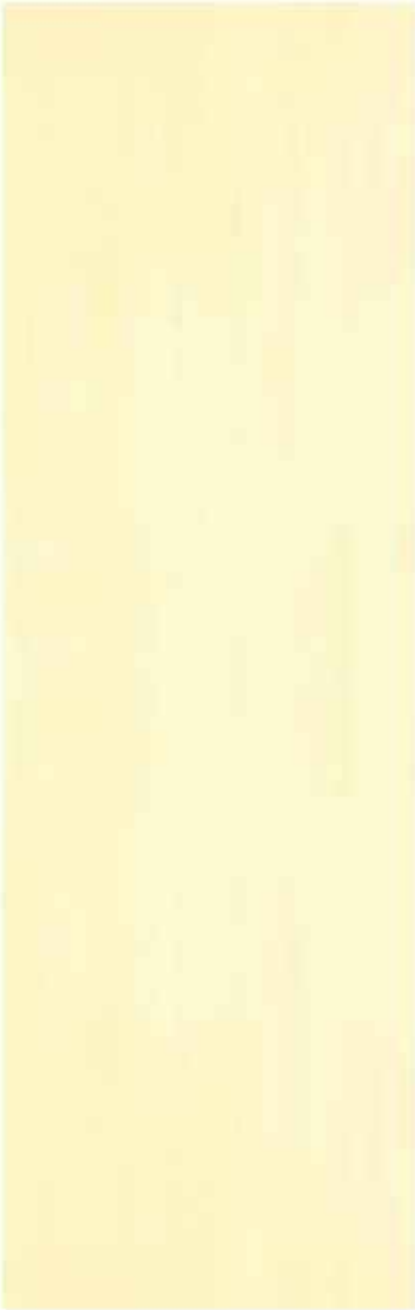

**DOUGLAS FIR**

Design#: 770 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**LOUISIANA OAK**

Design#: 5082 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**NORDIC WALNUT**

Design#: 5333 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**AUSTIN WALNUT**

Design#: 5349 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



WOODS

BRING THE JOY OF WOODGRAIN INTO YOUR DESIGNS



**BLACK FOREST**

Design#: 5380 SUD

Thickness: 1 mm

Available Texture: SUD/MAT




**REFRESH OAK**

Design#: 5427 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**WHITE**

Design#: 101 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**WOOL**

Design#: 107 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



COLOURS

BEAUTIFUL COLOURS TO SUIT ALL PURPOSES




**MYSORE IVORY**

Design#: 124 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**MOON STONE**

Design#: 133 SUD

Thickness: 1 mm

Available Texture: SUD/MAT




**MUSTARD**

Design#: 137 SUD

Thickness: 1 mm

Available Texture: SUD/MAT

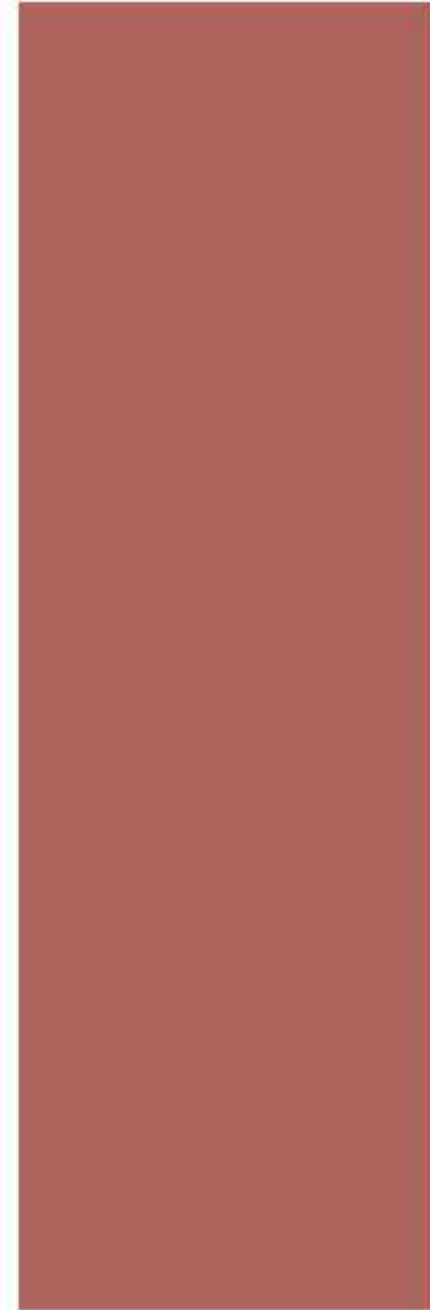

**TERRACOTTA**


Design#: 138 SUD

Thickness: 1 mm

Available Texture: SUD/MAT





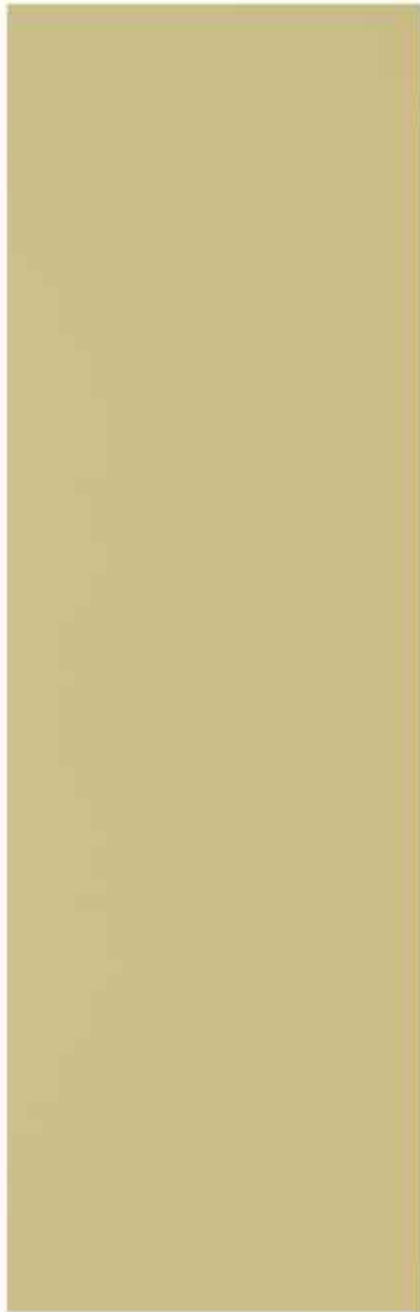


**BEIGE**

Design#: 141 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**OATMEAL**

Design#: 146 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**ALMOND**

Design#: 152 SUD

Thickness: 1 mm

Available Texture: SUD/MAT




**CHOCOLATE**

Design#: 181 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



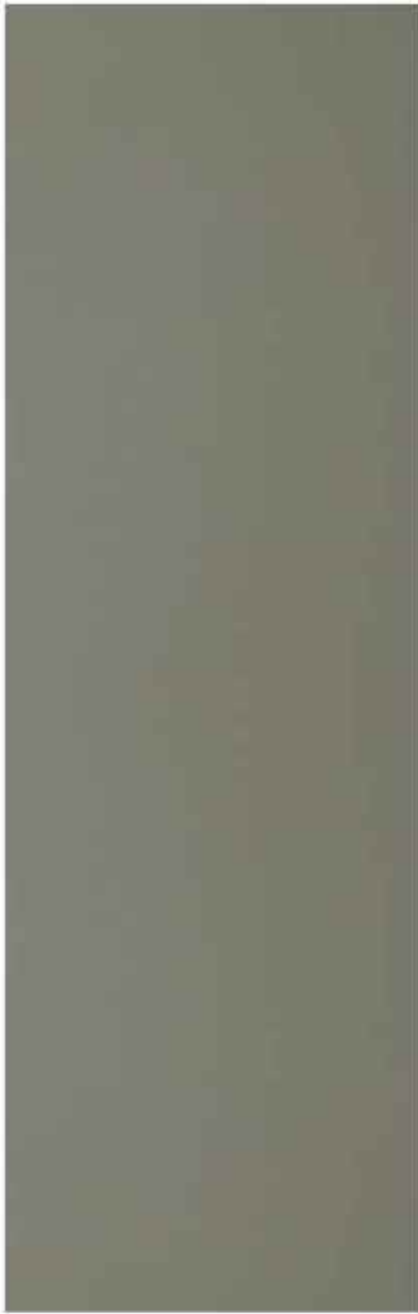

**DARK GREY**

Design#: 261 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**PEARL GREY**

Design#: 275 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



**ELECTRIC BLUE**

Design#: 291 SUD

Thickness: 1 mm

Available Texture: SUD/MAT




**YELLOW**

Design#: 229 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



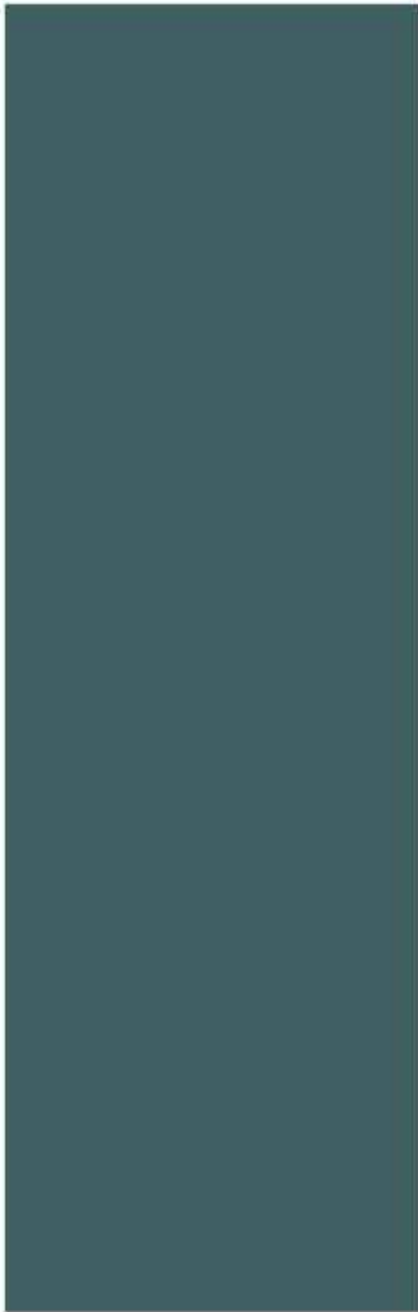

EMERALD

Design#: 364 SUD

Thickness: 1 mm

Available Texture: SUD/MAT




NOIR CURRENT

Design#: 458 SUD

Thickness: 1 mm

Available Texture: SUD/MAT

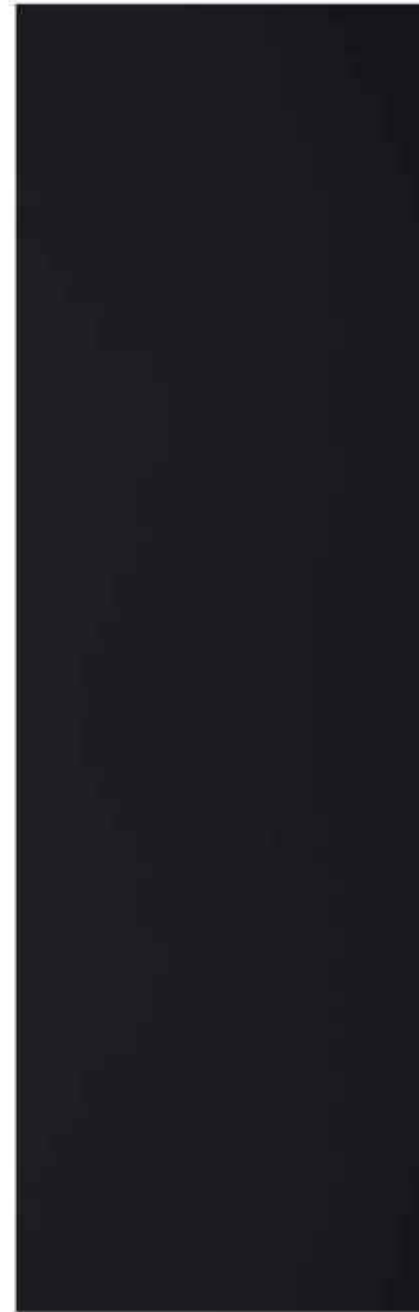

BLACK

Design#: 401 SUD

Thickness: 1 mm

Available Texture: SUD/MAT



S.No.	PROPERTIES	TEST STANDARD	UNIT	SPECIFIED VALUES	GREENLAM VALUES	SPECIFIED VALUES	GREENLAM VALUES
1	Classification & test protocol	IS 2046 : 1995		HGS, Thickness 1.0 mm		HGS, Thickness 1.5 mm	
<b>PHYSICAL &amp; DIMENSIONAL PROPERTIES</b>				<b>PHYSICAL &amp; DIMENSIONAL PROPERTIES</b>			
2	Nominal thickness	mm	mm		1.0	1.5	
3	Thickness variation	Clause - 5.3	mm	1.0 ± 0.10	Conforms	1.5 ± 0.15	Conforms
4	Tolerance on length	Clause - 5.4.6	mm	+10, -Nil	Conforms	+10, -Nil	Conforms
5	Tolerance on width	Clause - 5.4.6	mm	+10, -Nil	Conforms	+10, -Nil	Conforms
6	Straightness of edges	Clause - 5.4.7	mm/m	1.5 (max.)	Conforms	1.5 (max.)	Conforms
7	Squareness	Clause - 5.4.8	mm/m	1.5 (max.)	Conforms	1.5 (max.)	Conforms
8	Density	EN ISO 1183 -1:2004	kg/m <sup>3</sup>	1360 - 1400	Conforms	1360 - 1400	Conforms
9	<b>Dimensional stability at elevated temperatures</b>						
	Longitudinal direction	Annex - F	%	0.55 (max.)	Conforms	0.44 (max.)	Conforms
	Transverse direction	Annex - F	%	1.05 (max)	Conforms	0.86 (max)	Conforms
10	<b>Dimensional stability at 20°C</b>						
	Longitudinal direction	Annex - G	%	0.38 (max.)	Conforms	0.32 (max.)	Conforms
	Transverse direction	Annex - G	%	0.60 (max.)	Conforms	0.48 (max.)	Conforms
<b>MECHANICAL PROPERTIES</b>				<b>MECHANICAL PROPERTIES</b>			
11	<b>Resistance to immersion in boiling water</b>						
	Mass increase	Annex - D	%	0.38 (max.)	Conforms	0.32 (max.)	Conforms
	Thickness increase	Annex - D	%	11.8 (max.)	Conforms	8.0 (max.)	Conforms
	Appearance	Annex - D	Grade	Not worse than 4	Conforms	Not worse than 4	Conforms
12	<b>Resistance to impact by small diameter ball</b>						
	Spring force	Annex - H	N	20	Conforms	20	Conforms
13	Resistance to cracking	Annex - K	Grade	Not worse than 4	Conforms	Not worse than 4	Conforms
<b>SURFACE PROPERTIES</b>				<b>SURFACE PROPERTIES</b>			
14	Resistance to scratching	Annex - L	N	2.0 (min.)	Conforms	2.0 (min.)	Conforms
15	Resistance to steam	Annex - T	Grade	Not worse than 4	Conforms	Not worse than 4	Conforms
16	Resistance to water vapor	EN 438-2-14	Class	Not worse than 4	Conforms	Not worse than 4	Conforms
17	Resistance to dry heat at 180° C						
	Gloss finish	Annex - E	Grade	Not worse than 3	Conforms	Not worse than 3	Conforms
	Other finish	Annex - E	Grade	Not worse than 3	Conforms	Not worse than 3	Conforms
18	Resistance to surface wear	Annex - C	Rev.	350 (min.)	Conforms	350 (min.)	Conforms
19	Resistance to cigarette burns	Annex - P	Grade	Not worse than 3	Conforms	Not worse than 3	Conforms
20	<b>Resistance to staining</b>						
	Group 1 & Group 3 & 4	Annex - M	Grade	Not worse than 5	Conforms	Not worse than 5	Conforms
		Annex - M	Grade	Not worse than 4	Conforms	Not worse than 4	Conforms
21	Resistance to color change in Xenon arc lamp	Annex - N	Grade	Not worse than 6	Conforms	Not worse than 6	Conforms
<b>HEALTH &amp; ENVIRONMENTAL CHARACTERISTICS</b>				<b>HEALTH &amp; ENVIRONMENTAL CHARACTERISTICS</b>			
22	Food safe	EN 13130-1	-	-	YES	-	YES
23	Contents' migration as per Food Commission Regulation	EN 1186-1, 3 & 14: 2002	Migration		Migration of simulants is less than maximum permitted by regulation		
24	Formaldehyde emission (release)	EN 16516-2017	ppm	0.1	0.02	0.1	0.02
25	Volatile organic compounds (VOC) emission	ISO 16000-9 UL 2818 - 2013	Class Certification	-	A	-	A
26	<b>Anti-viral efficacy &amp; activity</b>				GREENGUARD GOLD		
	% reduction in 24 hours activity after 24 hours	ISO 21702-2019	% Log Reduction	95 (min.) 2.0 (min.)	99.9 (min.) Exceeds	95 (min.) 2.0 (min.)	99.9 (min.) Exceeds
27	<b>Anti-bacterial efficacy &amp; activity</b>						
	% reduction in 24 hours activity after 24 hours	JIS 2801-2012	% Log Reduction	95.0 (min) 2.0 (min)	99.99 Exceeds	95.0 (min) 2.0 (min)	99.99 Exceeds
28	<b>Anti-fungus efficacy</b> growth after 28 days		Class	1	0 (No Growth)	1	0 (No Growth)

**Limited Warranty:**

Greenlam Industries Limited warrants to the original buyer that Greenlam Laminates will be free of defects under normal, proper and intended usage, within acceptable manufacturing specification, buyer's remedy in case of claims, as a result of defective laminate, shall be limited to only the replacement of laminate by Greenlam Industries Limited.

**Note:**

Application images shown in the catalogue are for illustration purpose only, please refer to the actual product sample for color and finish available. The samples shown here are only indicative of the colour patterns and finishes available.  
\*Greenlam is available in 1.00mm Greenlam superior is available in 1.5mm

**Disclaimer:**

\*As per the test report SARS Cov-2 virus gets more than 99% retarded after 45 mins of the contact\*  
\*As per the test report virus gets 99.99% retarded in 24 hours of contact\*  
\*As per test report bacteria gets 99.99% retarded after 24 hours of contact\*



# OUR COMMITMENT TO QUALITY ASSURANCE

SAFE AND HEALTHY LIVING ALONGSIDE GREENLAM PRODUCTS



The entire range of Greenlam Laminate is Anti-Virus & Anti-Bacterial, that retards the growth and kills upto 99.99% of Viruses\*\* & Bacteria\*\*\*. Now proven effective against SARS CoV-2\* virus, making it world's 1st COVID – 19 resistant laminate.



#### GREENGUARD Certification

Greenlam Laminates are classified under the Low Emitting Product category when measured for potentially harmful emissions. This is an assurance that our products are ideal for use in interior environments where air quality is vitally important.



#### GREENGUARD Gold Certification

This certification, with a stricter criteria, means that Greenlam products are suitable for use in environments where children spend significant periods of time, including schools, daycares and healthcare facilities.



Greenlam laminates are certified by prestigious American body, NSF International, making them the safest laminates for human health. \*NSF certification is offered only for the listed products.



The FSC® certification is considered the "gold standard" designation for wood harvested from forests that are responsibly managed, socially beneficial, environmentally conscious and economically viable. If a product, like a piece of tropical hardwood furniture, is labeled as "FSC® Certified", it means that the wood used in the piece and manufacturer that made it met the requirements of the Forest Stewardship Council®. Greenlam provides FSC® certified product (Certificate No.: SCS-COC-003328) upon request.



Greenlam Laminates have been certified by Griha Council, and have been included in the GRIHA Product Catalogue under the following categories: GRIHA v.3 criterion:17; GRIHA v.2015 criterion: 21 & SVAGRIHA criterion:12, conforming that the product can be used in GRIHA & SVAGRIHA registered projects to meet GRIHA & SVAGRIHA norms respectively.

#### Disclaimer:

- \*\*As per the test report SARS Cov-2 virus gets more than 99% retarded after 45 mins of the contact"
- \*\*As per the test report virus gets 99.99% retarded in 24 hours of contact"
- \*\*\*As per test report bacteria gets 99.99% retarded after 24 hours of contact"

# BRANCH OFFICES

<b>AGRA</b> 7807000996	<b>AHMEDABAD</b> 9909963383	<b>BANGALORE</b> 6368892055	<b>BHUBANESHWAR</b> 9777454083	<b>CHANDIGARH</b> 9779450510 0172-82512583
<b>CHENNAI</b> 6361815215 044-42822672	<b>COIMBATORE</b> 9003917470 0422-4370407	<b>DELHI / NCR</b> 9650101768	<b>GHAZIABAD</b> 9650827111	<b>GUWAHATI</b> 8134944778 0361-2733308
<b>HYDERABAD</b> 9985711880 040-24801429	<b>INDORE</b> 840099585 0731-4206153	<b>JAIPUR</b> 9818040684 0141-2333747	<b>KOCHI</b> 9746474575 0484-2531596	<b>KOLKATA</b> 9007011903
<b>LUCKNOW</b> 9151799938 0522-4000475	<b>MUMBAI</b> 9136102399	<b>MADURAI</b> 9003917470	<b>MAGPUR</b> 9158888981	<b>PATNA</b> 9771404756 0612-6450235
<b>PUNE</b> 9730084601 020-26169307	<b>HISAR</b> 9998235599	<b>RAIPUR</b> 9752590672	<b>RANCHI</b> 9031002133	<b>VIJAYAWADA</b> 9949818673 0866-2523135

#### GLOBAL HEADQUARTERS

#### GREENLAM INDUSTRIES LIMITED

2nd Floor, West Wing, Worldmark 1, Aerocity, IGI Airport Hospitality District, New Delhi - 110 037

Tel : 91-11-42791399 E-mail : [info@greenlam.com](mailto:info@greenlam.com) Website : [www.greenlamindustries.com](http://www.greenlamindustries.com)

#### GREENLAM EXPERIENCE CENTER

##### Kolkata

25/B, Shop No. E & F,

Mirza Ghalib Road, Park Street.

Opposite: Westside Mall, Kolkata - 700016.

Contact No : +91-99303-18020; +91-62921-26662

Email: [experiencecenter.kolkata@greenlam.com](mailto:experiencecenter.kolkata@greenlam.com)

##### Ahmedabad

Showroom No- 1 & 2, Ground Floor,

Block-A, Westgate Business Bay, SG Highway,

Ahmedabad - 380051

Contact No. : 064970 77297

Email: [experiencecenter.ahmedabad@greenlam.com](mailto:experiencecenter.ahmedabad@greenlam.com)



Scan to download Greenlam Laminates designer shade card catalogue



Log on to [www.greenlamindustries.com](http://www.greenlamindustries.com)